



## **FATEK<sup>®</sup>** AUTOMATION CORPORATION

26FL., NO. 29, SEC. 2, ZHONGZHENG E. RD.,  
TAMSUI DIST., NEW TAIPEI CITY 25170, TAIWAN, R.O.C

TEL : +886-2-2808-2192

FAX : +886-2-2809-2618

E-mail : sales@fatek.com  
tech@fatek.com

Website : www.fatek.com

## **P5 Series** **Human Machine Interface**

- High Standards of Noise Immunity and Quality
- Optional Integrated Rear Mount PLC
- Intuitive Software Environment and Aesthetic GUI
- Powerful Programming Features

## The FATEK P5 series provides a high quality and high performance human machine interface with the option of an integrated PLC.

The P5 series represents the high quality and reliability expected in the industrial automation market today. The P5 series also allows the rear mounting of an integrated programmable controller saving space and installation costs. With its intuitive software programming environment and outstanding graphical representation, the P5 series helps create functional and elegant user interfaces.



## High Noise Immunity

HMIs at industrial sites are often adversely affected by electrical noise from the surrounding installations. This can cause malfunction and lead to injury to persons or property. FATEK has focused on the P5's stability and robustness to provide end users with a reliable HMI product that can operate in harsh conditions.



## In-built Termination Resistors for RS485/422 Ports

With RS-422/RS-485 communication networks, termination resistors are often required to improve the reliability of communications. External termination resistors can make communication wiring onsite complex. To solve this problem, the P5 provides built-in termination resistor switches. Terminating can be achieved by turning on the switch to connect to termination resistors, or turn off the switch to disconnect the resistors.



## Optional Integrated PLC

The P5 series provides cableless communications to the FATEK HB1 PLC by offering a version that can be mounted onto the back of the P5 HMI. This provides more reliability and improves communication speeds with the added benefit of saving valuable space and installation costs.



# Intuitive Programming Software Environment

**1. Toolbar & Shortcut:**

Icon-based organized design, enables users to operate what they want efficiently

**2. Project Explorer:**

Divide functions into 3 categories, collapsible, space-saving

**3. Screen List:**

Screen preview allows users to access a specific screen quickly

**4. Screen Workspace:**

What You See Is What You Get

**5. Tab Page:**

Switch view effortlessly

**6. Memory Address:**

View the status of memory usage



**7. Object List:**

Trace every object that the user creates currently

**8. User Toolbox:**

Drag the customized object into this area, and then you can use it anytime, everywhere

**9. Output Message:**

Compiling result will be displayed here. Double clicking the error message leads users to review the setting directly

**10. Screen Toolbar:**

Adjust the proportion of the screen and simulate the displaying status of the objects

**11. Ribbon Style:**

Change the default color scheme from several Ribbon styles

**12. Toolbox:**

Wide variety of useful, elegant objects to utilize

## Topic 1

### Different Ribbon Style, Different Arrangement of Workspace



## Topic 2

### Use Wizard to Complete Project Setting in Three Steps




# EasyEasy Planning and Rich Resources



## Pipe Line

A pipeline is composed of L/T/Cross joints and pipes. You can create a pipeline easily and efficiently. At runtime, You can also control a pipeline to change color, blink, and flow effect dynamically.

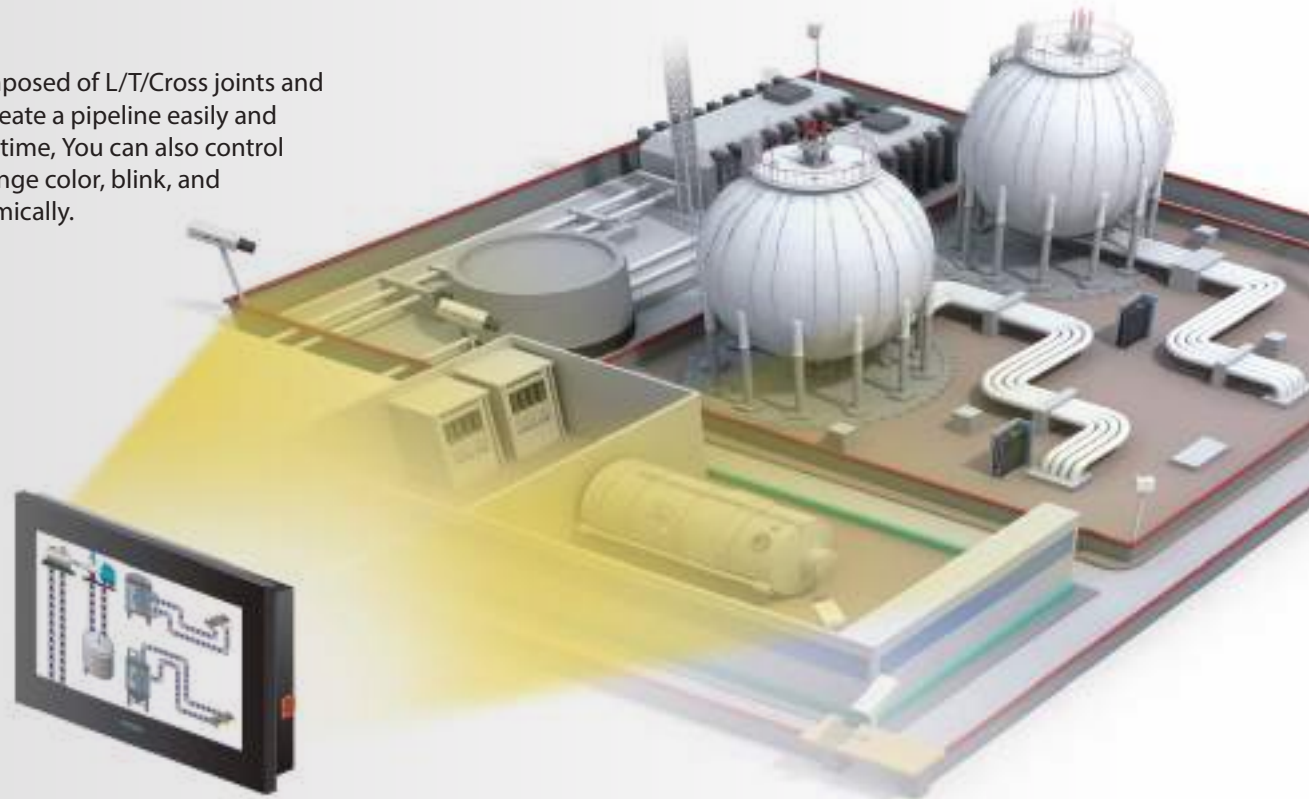

## Toolbox

- Provides many useful objects like shapes, meters, charts, buttons etc.
- Utilize them from the Toolbox section to speed up the design time




## User Toolbox

Drag user-defined objects into User Toolbox section, and these objects would become reusable. Export and import functions are also provided, which saves valuable time during program development.



## Automatic alignment

Support snap alignment and grid alignment functions, and assist users to design faster and more conveniently.

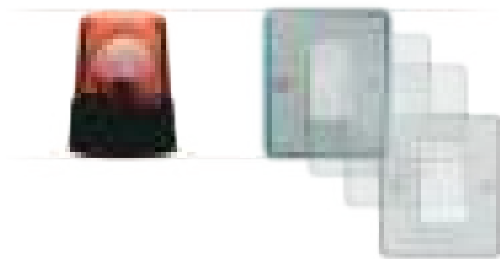

## User-defined Keypad


Can customize the style of the keypad, supports unicode string input.



## Resources

Support a plentiful of resource libraries that allow users to customize the content and apply it to any project applications.

- Image Library: Thousands of industrial images to choose from, or import your own images.
- Audio Library: Use the Audio Library to play the sound you like when an alarm happens or a button is clicked.
- Font Library: The capacity of font files is minimized, thus minimizing memory usage.
- Text Library: Multi-language support satisfies your requirement of localization. You can even change the language setting dynamically at runtime.
- Tag Library: Make abstract address's text easy to be understood for system planning.


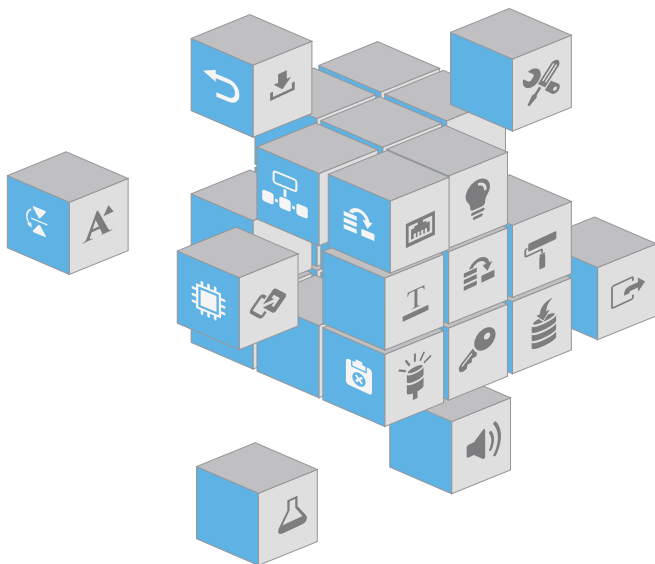


# Security and Safety Control



## Intellectual Property Rights Protection


- The project can be protected by the password and it requires password verification for users to edit the file.
- Password protection supports download/ upload of HMI project, system setting and update of FATEK PLC program via USB flash disk.
- Supports project to execute protection function, the customer ID on the project and HMI device must set the same to run.
- Provides HMI internal register for users to change passwords directly and customize startup screen easily.
- The script allows you to design custom functions for your customers. You can also set passwords to these custom functions, so that your customers will be requested to enter passwords when they want to use them or see the source code

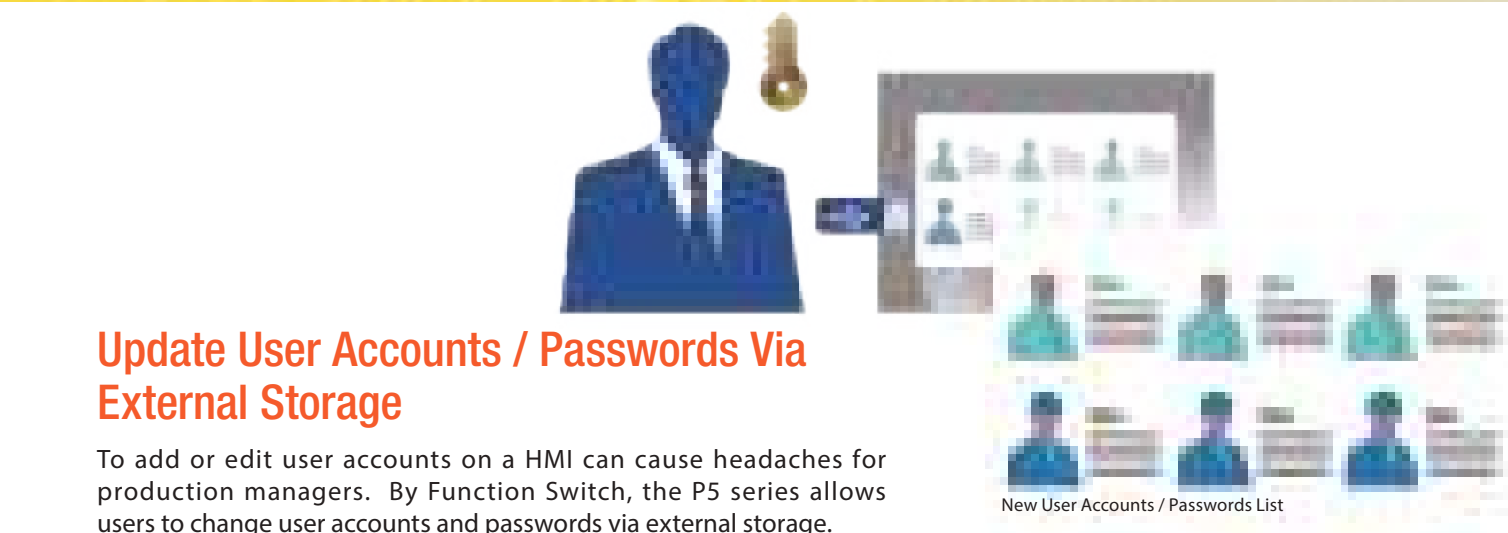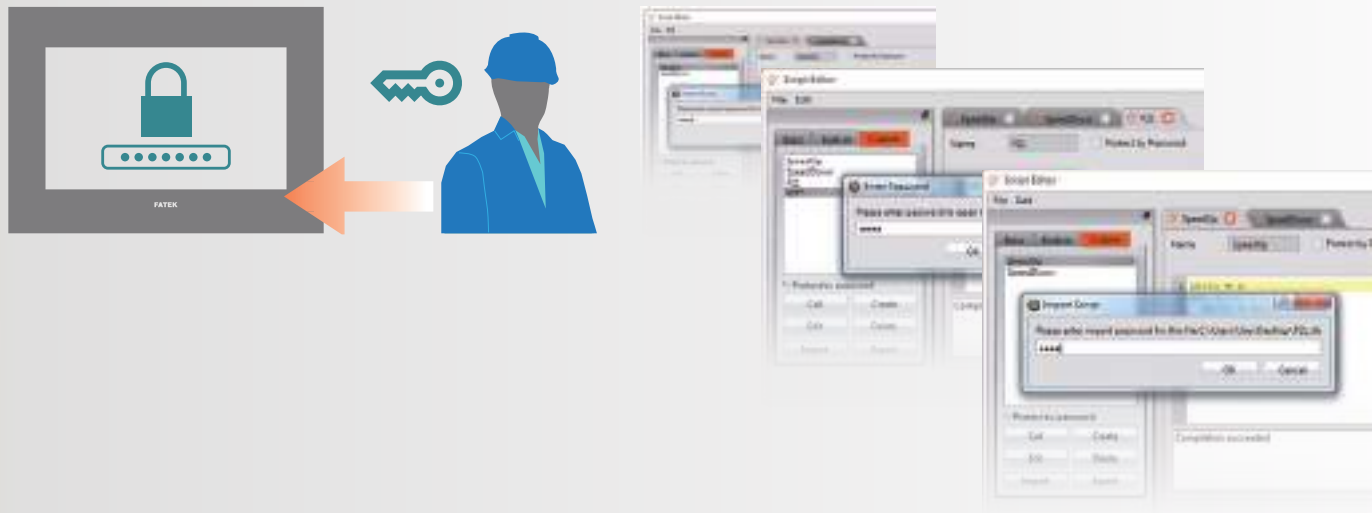

## Update User Accounts / Passwords Via External Storage


To add or edit user accounts on a HMI can cause headaches for production managers. By Function Switch, the P5 series allows users to change user accounts and passwords via external storage.

New User Accounts / Passwords List

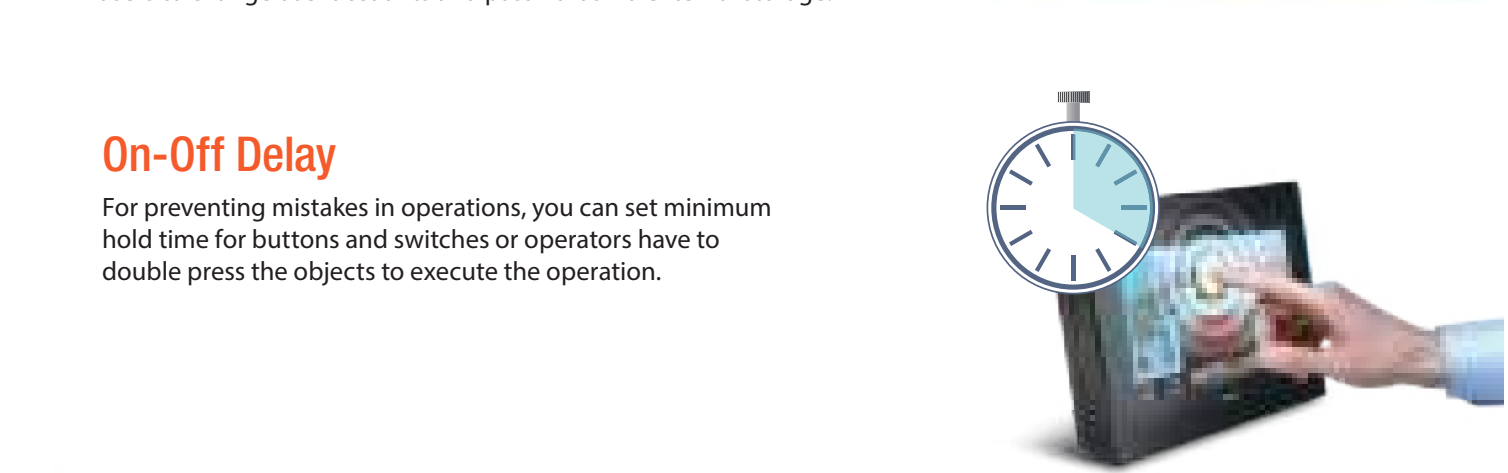

## On-Off Delay

For preventing mistakes in operations, you can set minimum hold time for buttons and switches or operators have to double press the objects to execute the operation.

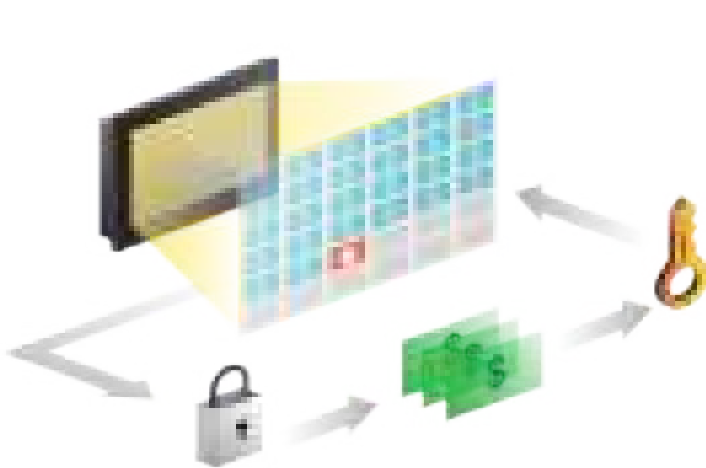


## Pay by Installments

- Static mode provides up to 48 periods, and each deadline can be different intervals between each one.
- Provides runtime modify function for set up machine without re-downloading project.
- Dynamic mode does not need to decide expired date in advance.
- Just use the key and the password generator to generate a password that contains the next expiration date.

## Security

Security function provides 16 access levels and 100 user accounts, and each level and user can have different passwords; import and export functions are provided, increasing flexibility and convenience.

For security control, operations for switches, buttons and inputs are banned if operators input incorrect password; objects on HMI screen can even be hidden if operators have no privilege to see the objects.

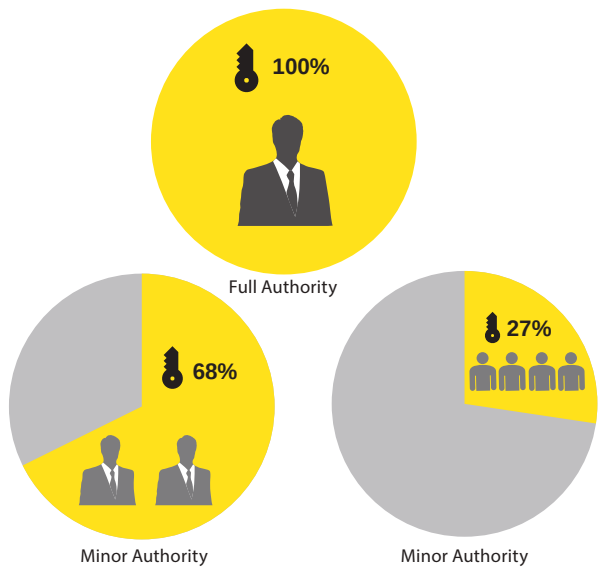

# Alarm, Trend, Data Log, E-mail, Camera

## Step1:

Use the Alarm function to set the threshold value for monitoring system status.

## Step2:


When alarm is triggered, operators can see the scrolling text displaying the predefined message on the assigned position, or use the alarm display to see the detailed message; audio can be played to remind the unaware operators.

## Step3:

Pop up the child window to get a further message or for post-processing.

## Step4:

User can also receive the email that attached the alarm information and the captured camera image on site. Then review the history records of Data Log and Operation Log for root cause investigation.

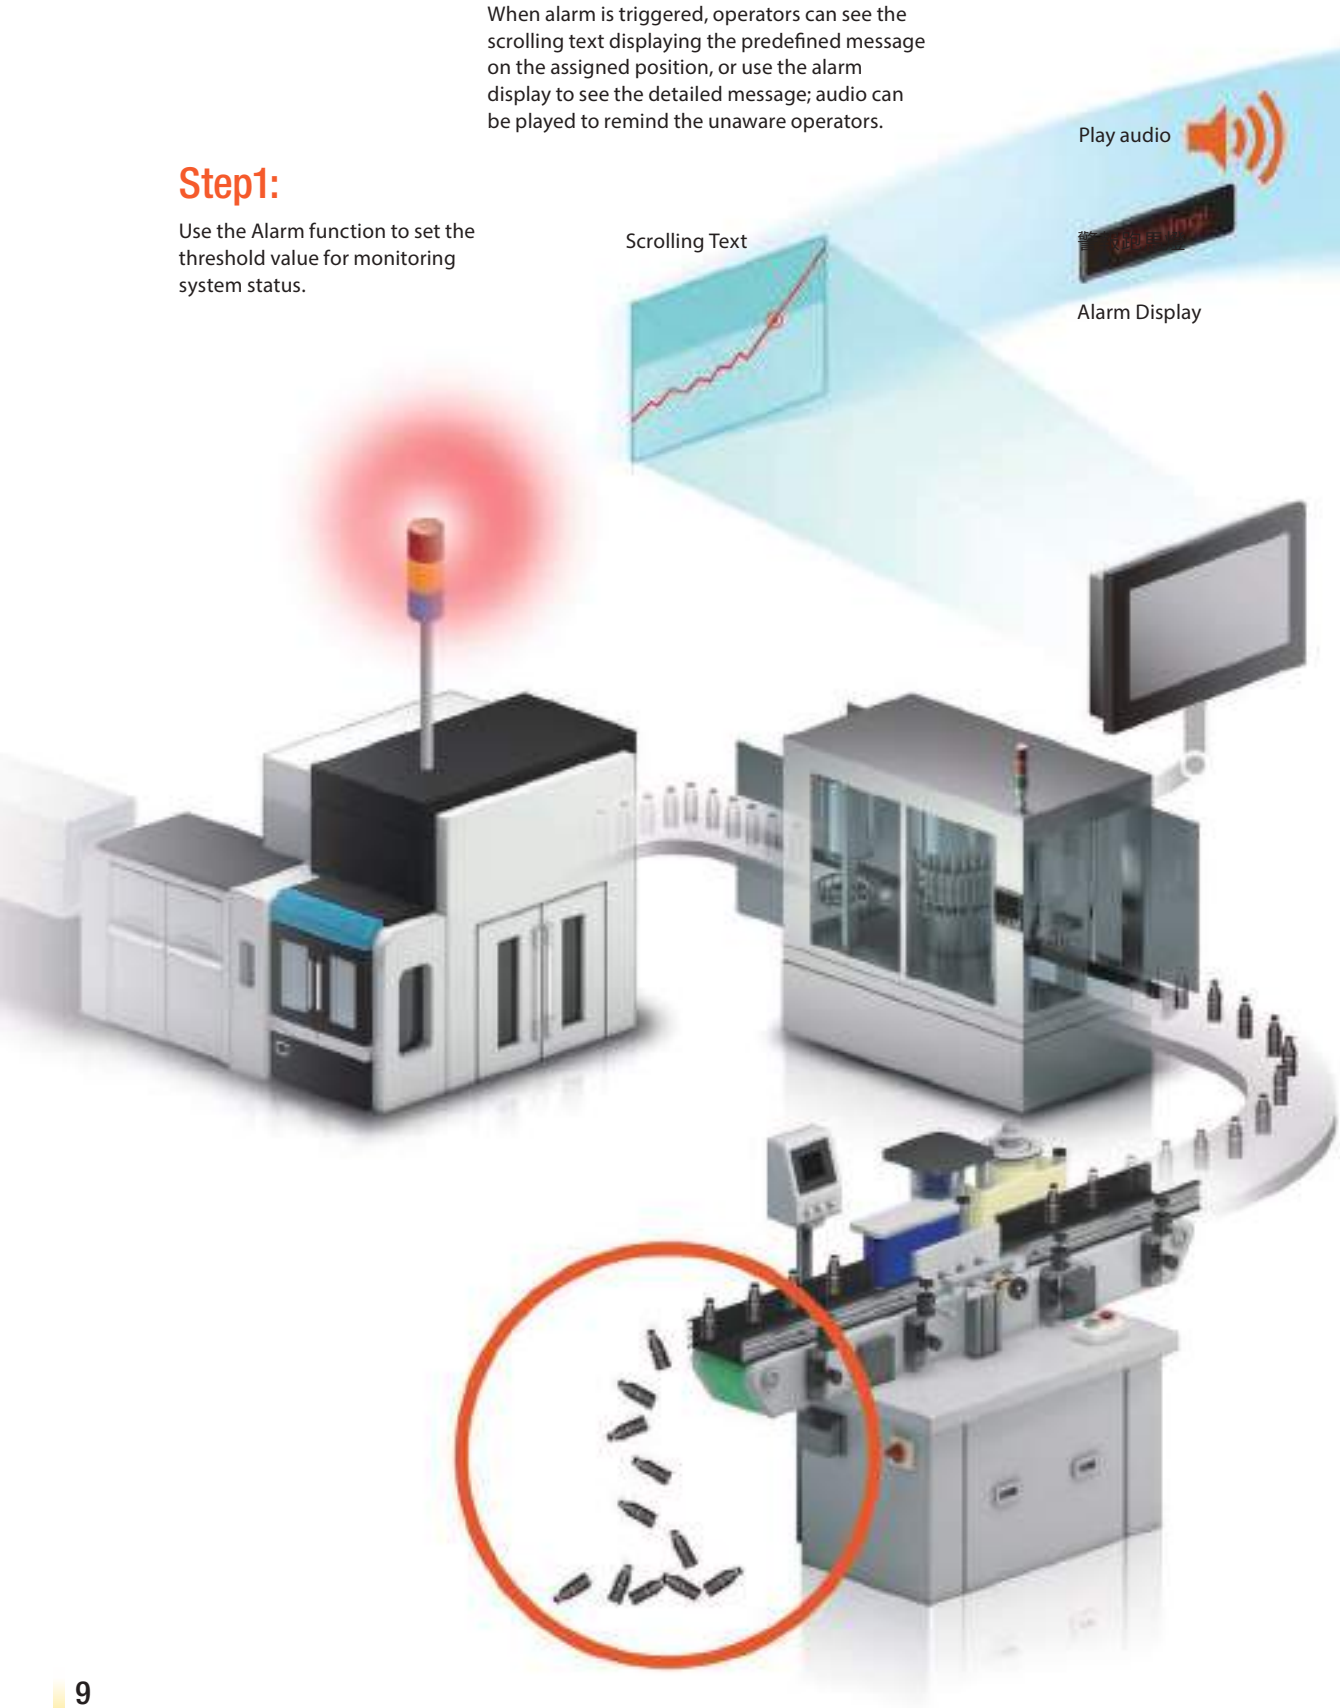

## Email

- Send important messages to recipients through triggered alarm.
- Can configure the contact lists and groups, easy to assign recipients.
- Provide SSL/TTL encryption mechanism to ensure file security.

## Camera

- Support USB camera input and display images directly on the HMI screen.
- Can capture the image and save to the USB storage or send the site image via email.



Users can receive emails that contain alarm information and captured images from the site.


## Data Log

- A maximum of 64 Data Log groups
- Each group can monitor a maximum of 512 addresses
- You can use the trend chart to observe the variance of data; a user is capable of clearing, zooming in/out, moving left/right/top/down the chart on screen, creating a chart with two Y-axes on screen. Or use historic data table to see the overall information in real-time
- You can decide the event for triggering the data logging and the time interval for every occurrence. Export and import data log as you need
- The source of data set can come from different controllers



## Data Backup

- The data from Data Log, Alarm and Operation Log can be exported to the assigned location automatically(HMI, microSD card, usb).
- Or enable the ability of data retention in the Data Log, Alarm, Recipe and Operation Log function, and there is no need to worry about the data loss even when power failure happens.
- By combining with the Schedule and Script function, the backup timing can be triggered whenever the user wants.





Multi-Link

- PLC connected to Master HMI can be accessed by Slave HMI, Cost Reduced!
- Easy setup, speed up development.

FATEK IoT and Cloud Platform

- Support FATEK IoT solution.
- Support MQTT protocol(Publisher/Subscriber/Broker) easily get in touch with major cloud platforms.

NTP

Network Time Synchronization function synchronizes the time of all HMIs, no need to worry about time delay.

Data Transfer

This function enables the ability of communication between HMI and PLC. Users can move data from a predefined source (HMI, PLC, file) to a target address under a user-defined condition.

User-defined protocol

- With simple operation setting to customize the third-party communication transmission or return data instruction format, users can access the device data easily.
- Provide automatic input of various communication checksums, which is convenient and efficient.
- Script also supports this function to make system planning more flexible.

Modbus gateway

- Through Modbus gateway function, client can easily achieve remote monitoring and data collections with SCADA, HMI or other Modbus devices.
- Support Ethernet (Modbus TCP) and serial communication (Modbus RTU/Modbus ASCII)
- Support the data exchange between Modbus protocol and other protocols (a variety of PLCs, server, temperature controller and converter...)
- Customizable Modbus address correspondence table

# Remote Monitor and Control

## FTP Server

Enable FTP server, users don't have to go to the equipment site in person, they can easily read and write data files of HMIs by using PC via Ethernet.

## VNC

This will improve engineers' mobility and flexibility and hence promote the efficiency and productivity.

## VNC Server

Support VNC function, display the screen directly on pad, PC or smart phone through remote connection, and it can be used to monitor and operate remotely.



# Integrated HMI + PLC

FATEK HMI and PLC solution is highly integrated system. The hardware has high noise immunity. The internal communication is optimized and use highest speed baudrate. There are many useful and powerful PLC software features built-in HMI. It helps user to maintain the system conveniently and quickly.


## On-line Monitoring PLC Ladder Program

The PLC ladder program is displayed on the screen. Engineers can check machine status and find errors quickly.




## Import Tags from WinProladder Project

Engineers can import tags from the WinProladder projects when they develop HMI projects. This avoids repetitive typing of tags information, thus greatly saving engineering time and improving work efficiency.

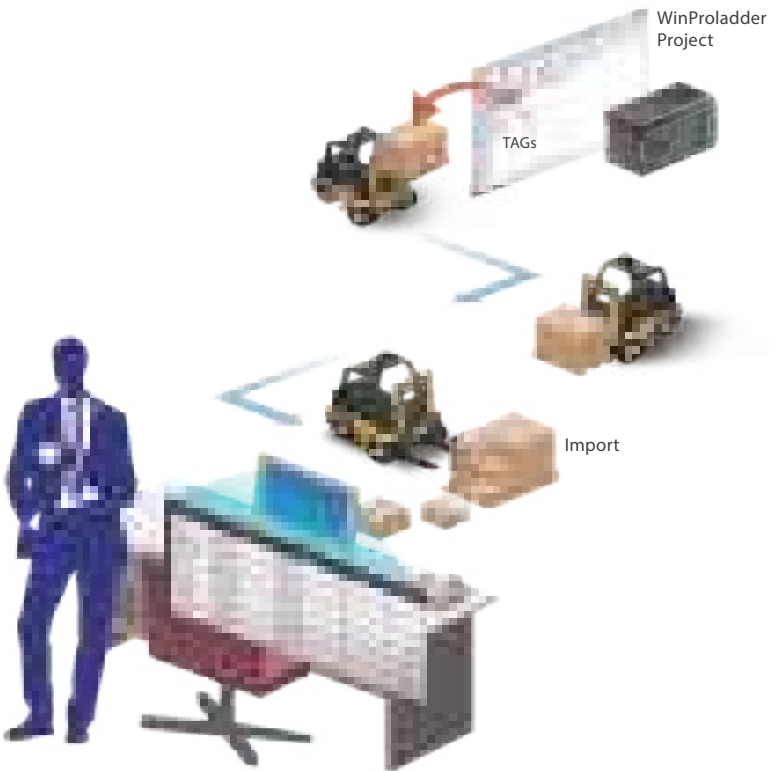

## USB Flash Drive Maintenance


- Site personnel need not use PC to maintain the equipment. He can just use usb flash drive to upgrade PLC ladder program and HMI application.
- In addition to this, user also can access datalog and alarm data, modify recipe parameters, and change security password by using usb flash drive.

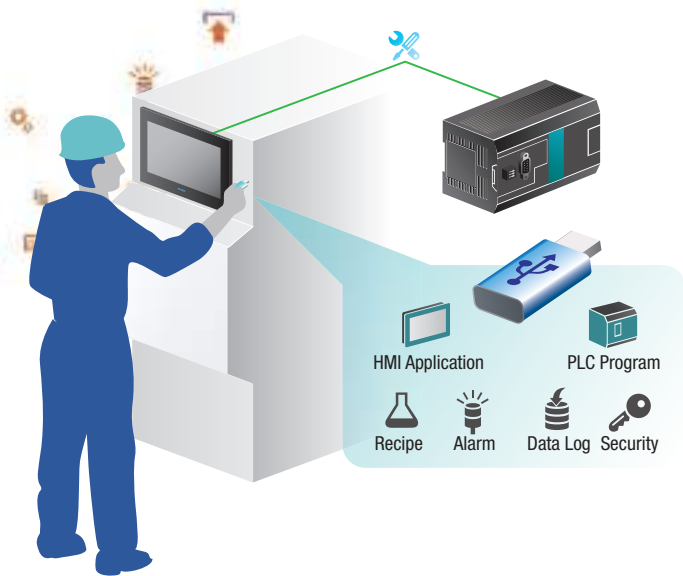

# Powerful Programming Features


## Script

- User can flexibly use Script to complete a complex task that cannot easily be accomplished with general objects. The Script functions include logical judgments, numerical computations, loop executions, string manipulation, communications between devices etc.
- Support user-defined functions, which can be imported and exported for the usage of future project designs, making it time-saving and adding flexibility
- Real-time display compiling result by which the user can correct contents immediately
- Provide password protection for engineers to protect their intellectual property

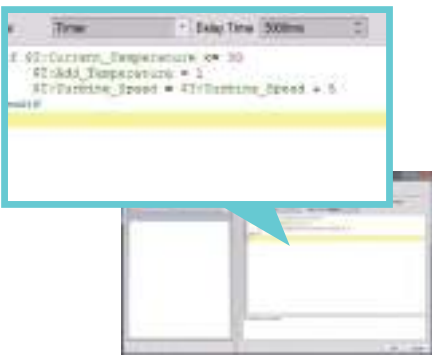


## Fast Update

Provides users in different situations to select the update speed to get the latest data.

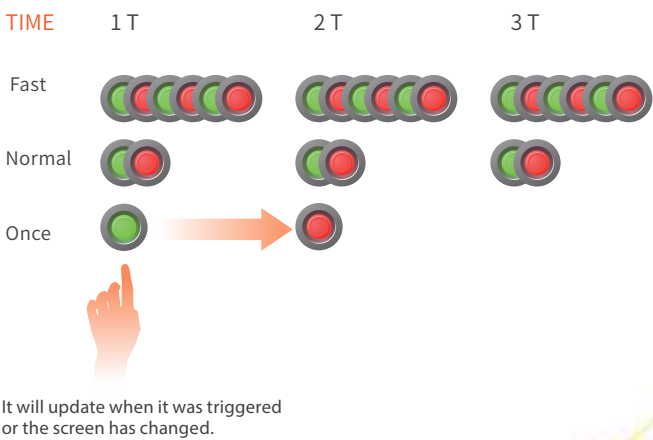

## Schedule


Up to 64 schedules could be set. This function allows users to trigger event at a predefined time, or change schedule date at runtime. The event includes setting/resetting a bit, writing a word and executing script.

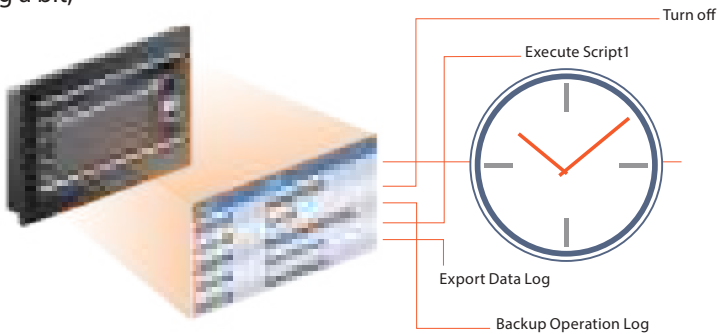

## Recipe

- With Recipe function, you can store a set of verified data in HMI, and download to PLC whenever necessary
- The recipe data can be from a csv file, so operators do not need to enter parameters manually
- A built-in recipe editor for users to edit the contents
- Useful Recipe objects for users to choose from
- Add/Edit recipe at runtime

|       | Milk | Water | Butter | Chocolate | Flour | Yeast | Egg |
|-------|------|-------|--------|-----------|-------|-------|-----|
| Cake1 | 50   | 75    | 1.3    | 2         | 100   | 0.1   | 2.4 |
| Cake2 | 40   | 100   | 0.7    | 1         | 200   | 0.05  | 1.2 |
| Cake3 | 50   | 60    | 0.6    | 2         | 120   | 0.13  | 0.8 |

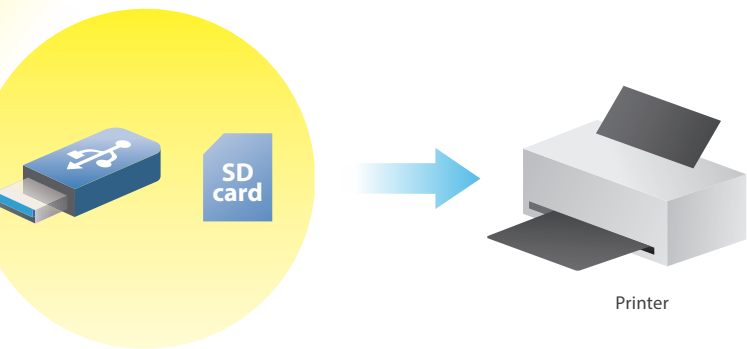

## Print function

- The project image can be printed and stored in to HMI, SD cards, and USB storage devices.
- The image range is selectable, and the image can also be rotated and reversed.
- User can use Function Switch or a Script to print out the screen image, and also can cancel your printing if needed while the printing is under progress.

Specification



| Spec.                |                             | Model                                                                                                                                         | P5043SA  | P5043NA | P5070SA                                                               | P5070NA  | P5070ZA  | P5101SA                                                               | P5101NA  | P5101ZA |
|----------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|-----------------------------------------------------------------------|----------|----------|-----------------------------------------------------------------------|----------|---------|
| Display              | Panel Type                  | TFT LCD, 16.7M Colors                                                                                                                         |          |         | TFT LCD, 16.7M Colors                                                 |          |          | TFT LCD, 16.7M Colors                                                 |          |         |
|                      | Panel Size                  | 4.3" (16:9)                                                                                                                                   |          |         | 7.0" (16:9)                                                           |          |          | 10.1" (16:9)                                                          |          |         |
|                      | Resolution                  | 480 X 272                                                                                                                                     |          |         | 800 X 480                                                             |          |          | 1024x600                                                              |          |         |
|                      | Contrast Ratio              | 500                                                                                                                                           |          |         | 500                                                                   |          |          | 450                                                                   |          |         |
|                      | Backlight                   | LED, 500nits                                                                                                                                  |          |         | LED, 400nits                                                          |          |          | LED, 300 nits                                                         |          |         |
|                      | Backlight Life Time         | 30,000 Hrs.                                                                                                                                   |          |         | 30,000 Hrs.                                                           |          |          | 25,000 Hrs.                                                           |          |         |
|                      | LCD Viewing Angle (T/B/L/R) | 50/70/70/70                                                                                                                                   |          |         | 70/50/70/70                                                           |          |          | 50/20/55/55                                                           |          |         |
| Touch                | Type                        | 4-wire Resistive Film                                                                                                                         |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Accuracy                    | X axis+/-2%; Y axis +/-2%                                                                                                                     |          |         |                                                                       |          |          |                                                                       |          |         |
| System               | CPU                         | 32 bit RISC Cortex 600MHz                                                                                                                     |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Flash                       | 256MB                                                                                                                                         |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | RAM                         | 128MB                                                                                                                                         |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | RTC                         | Built-in                                                                                                                                      |          |         |                                                                       |          |          |                                                                       |          |         |
| I/O Port             | Serial 1                    | Connector: D-Sub 9-Pin<br>COM1: RS-232<br>COM2: RS-422/485<br>COM3: RS-485                                                                    |          |         | Connector: D-Sub 9-Pin<br>COM1: RS-232                                |          |          | Connector: D-Sub 9-Pin<br>COM1: RS-232                                |          |         |
|                      | Serial 2                    | ---                                                                                                                                           |          |         | Connector: Pluggable Terminal Block<br>COM3:RS-422/485<br>COM4:RS-485 |          |          | Connector: Pluggable Terminal Block<br>COM3:RS-422/485<br>COM4:RS-485 |          |         |
|                      | Ethernet                    | ---                                                                                                                                           | 10M/100M | ---     | 10M/100M                                                              | 10M/100M | ---      | 10M/100M                                                              | 10M/100M |         |
|                      | USB                         | USB2.0 Type-A (Host)x1<br>USB2.0 Type mini-B (Device)x1                                                                                       |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Micro-SD Slot               | ---                                                                                                                                           | ---      | ---     | ---                                                                   | Yes      | ---      | ---                                                                   | Yes      |         |
|                      | Audio                       | ---                                                                                                                                           | ---      | ---     | ---                                                                   | Yes      | ---      | ---                                                                   | Yes      |         |
|                      | Termination Switch          | Yes(RS-422/485)                                                                                                                               |          |         |                                                                       |          |          |                                                                       |          |         |
| I/O Extension        | PLC Extension               | HB1 main units<br>(10/14MB Series)                                                                                                            |          |         | HB1 main units + B1 extension modules                                 |          |          |                                                                       |          |         |
|                      | HMI Extension               | Yes                                                                                                                                           |          |         |                                                                       |          |          |                                                                       |          |         |
| Power                | Power Input                 | 14VDC-32VDC (Isolated Power)                                                                                                                  |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Isolation Resistance        | 50MΩ at 500VDC                                                                                                                                |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Power Consumption           | 9.58W                                                                                                                                         | 10.08W   | 11.48W  | 11.98W                                                                | 12.48W   | 11.02W   | 11.52W                                                                | 12.02W   |         |
| Environment          | Protection Structure        | Front Panel: IP65                                                                                                                             |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | PCB Coating                 | Yes                                                                                                                                           |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Operating Temp.             | 0 ~ 50℃                                                                                                                                       |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Storage Temp.               | -20 ~ 60℃                                                                                                                                     |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Relative Humidity           | 10% ~ 90%@40℃ (non-condensing)                                                                                                                |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Withstand Voltage           | AC500V/ 20mA/ 1Min. (between charger & FG terminals)                                                                                          |          |         |                                                                       |          |          |                                                                       |          |         |
|                      | Vibration Endurance         | 5 to 9Hz Half-amplitude: 3.5mm<br>9 to 150 Hz Constant Acceleration: 19.6m/s2 (2G)<br>3 directions of X, Y, Z: 10times (IEC61131-2 compliant) |          |         |                                                                       |          |          |                                                                       |          |         |
| Enclosure            |                             | Plastic                                                                                                                                       |          |         |                                                                       |          |          |                                                                       |          |         |
| Dimension/<br>Weight | Cut-out                     | 118.5 x 92.5 (mm)                                                                                                                             |          |         | 191.5 x 137.5 (mm)                                                    |          |          | 259.5 x 201.5 (mm)                                                    |          |         |
|                      | W x H x D                   | 128.0 x 102.0 x 36.4 (mm)                                                                                                                     |          |         | 201.0 x 147.0 x 38.3 (mm)                                             |          |          | 271.5 x 213.5 x 44.9 (mm)                                             |          |         |
|                      | Weight                      | 215 (g)                                                                                                                                       | 235 (g)  | 610 (g) | 630 (g)                                                               | 650 (g)  | 1340 (g) | 1360 (g)                                                              | 1380 (g) |         |
| Certification        |                             | CE, UL*                                                                                                                                       |          |         |                                                                       |          |          |                                                                       |          |         |

\* Please inform when ordering




| Spec.                |                             | Model                                                                                                                                         | P5043SB  | P5043NB | P5070SB                                                               | P5070NB  | P5070ZB  | P5150ZB                                                                 |
|----------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|-----------------------------------------------------------------------|----------|----------|-------------------------------------------------------------------------|
| Display              | Panel Type                  | TFT LCD, 16.7M Colors                                                                                                                         |          |         | TFT LCD, 16.7M Colors                                                 |          |          | TFT LCD, 16.2M Colors                                                   |
|                      | Panel Size                  | 4.3" (16:9)                                                                                                                                   |          |         | 7.0" (16:9)                                                           |          |          | 15.0"(4:3)                                                              |
|                      | Resolution                  | 480 X 272                                                                                                                                     |          |         | 800 X 480                                                             |          |          | 1024 X 768                                                              |
|                      | Contrast Ratio              | 500                                                                                                                                           |          |         | 500                                                                   |          |          | 700                                                                     |
|                      | Backlight                   | LED, 500nits                                                                                                                                  |          |         | LED, 400nits                                                          |          |          | LED, 300nits                                                            |
|                      | Backlight Life Time         | 30,000 Hrs.                                                                                                                                   |          |         | 30,000 Hrs.                                                           |          |          | 50,000 Hrs.                                                             |
|                      | LCD Viewing Angle (T/B/L/R) | 50/70/70/70                                                                                                                                   |          |         | 70/50/70/70                                                           |          |          | 70/70/80/80                                                             |
| Touch                | Type                        | 4-wire Resistive Film                                                                                                                         |          |         |                                                                       |          |          |                                                                         |
|                      | Accuracy                    | X axis+/-2%; Y axis +/-2%                                                                                                                     |          |         |                                                                       |          |          |                                                                         |
| System               | CPU                         | 32 bit RISC Cortex 600MHz                                                                                                                     |          |         |                                                                       |          |          | 32 bit RISC Cortex 1GHz                                                 |
|                      | Flash                       | 256MB                                                                                                                                         |          |         |                                                                       |          |          | 256MB                                                                   |
|                      | RAM                         | 128MB                                                                                                                                         |          |         |                                                                       |          |          | 256MB                                                                   |
|                      | RTC                         | Built-in                                                                                                                                      |          |         |                                                                       |          |          |                                                                         |
| I/O Port             | Serial 1                    | Connector: D-Sub 9-Pin<br>COM1: RS-232<br>COM2: RS-422/485<br>COM3: RS-485                                                                    |          |         | Connector: D-Sub 9-Pin<br>COM1: RS-232                                |          |          | Connector: D-Sub 9-Pin<br>COM1: RS-232                                  |
|                      | Serial 2                    | ---                                                                                                                                           |          |         | Connector: Pluggable Terminal Block<br>COM3:RS-422/485<br>COM4:RS-485 |          |          | Connector: Pluggable Terminal Block<br>COM3: RS-422/485<br>COM4: RS-485 |
|                      | Ethernet                    | ---                                                                                                                                           | 10M/100M | ---     | 10M/100M                                                              | 10M/100M | 10M/100M |                                                                         |
|                      | USB                         | USB2.0 Type-A (Host)x1<br>USB2.0 Type mini-B (Device)x1                                                                                       |          |         | USB2.0 Type-A (Host)x1<br>USB2.0 Type C (Device)x1                    |          |          |                                                                         |
|                      | Micro-SD Slot               | ---                                                                                                                                           | ---      | ---     | ---                                                                   | Yes      | Yes      |                                                                         |
|                      | Audio                       | ---                                                                                                                                           | ---      | ---     | ---                                                                   | Yes      | Yes      |                                                                         |
|                      | Termination Switch          | Yes (RS-422/485)                                                                                                                              |          |         |                                                                       |          |          |                                                                         |
| I/O Extension        | PLC Extension               | HB1 main units<br>(10/14MB Series)                                                                                                            |          |         | HB1 main units + B1 extension modules                                 |          |          |                                                                         |
|                      | HMI Extension               | Yes                                                                                                                                           |          |         |                                                                       |          |          |                                                                         |
| Power                | Power Input                 | 14VDC-32VDC (Isolated Power)                                                                                                                  |          |         |                                                                       |          |          |                                                                         |
|                      | Isolation Resistance        | 50MΩ at 500VDC                                                                                                                                |          |         |                                                                       |          |          |                                                                         |
|                      | Power Consumption           | 9.58W                                                                                                                                         | 10.08W   | 11.5W   | 12W                                                                   | 12.5W    | 20W      |                                                                         |
| Environment          | Protection Structure        | Front Panel: IP65                                                                                                                             |          |         |                                                                       |          |          |                                                                         |
|                      | PCB Coating                 | Yes                                                                                                                                           |          |         |                                                                       |          |          |                                                                         |
|                      | Operating Temp.             | 0 ~ 50℃                                                                                                                                       |          |         |                                                                       |          |          |                                                                         |
|                      | Storage Temp.               | -20 ~ 60℃                                                                                                                                     |          |         |                                                                       |          |          |                                                                         |
|                      | Relative Humidity           | 10% ~ 90%@40℃ (non-condensing)                                                                                                                |          |         |                                                                       |          |          |                                                                         |
|                      | Withstand Voltage           | AC500V/ 20mA/ 1Min. (between charger & FG terminals)                                                                                          |          |         |                                                                       |          |          |                                                                         |
|                      | Vibration Endurance         | 5 to 9Hz Half-amplitude: 3.5mm<br>9 to 150 Hz Constant Acceleration: 19.6m/s2 (2G)<br>3 directions of X, Y, Z: 10times (IEC61131-2 compliant) |          |         |                                                                       |          |          |                                                                         |
| Enclosure            |                             | Plastic                                                                                                                                       |          |         |                                                                       |          |          | Aluminum                                                                |
| Dimension/<br>Weight | Cut-out                     | 118.5 x 92.5 (mm)                                                                                                                             |          |         | 175.0 x 130.0 (mm)                                                    |          |          | 348.0 x 274.0 (mm)                                                      |
|                      | W x H x D                   | 128.0 x 102.0 x 36.4 (mm)                                                                                                                     |          |         | 184.0x 139.0 x 35.0 (mm)                                              |          |          | 357.0x283.0x52.5 (mm)                                                   |
|                      | Weight                      | 215 (g)                                                                                                                                       | 235 (g)  | 465 (g) | 485 (g)                                                               | 505 (g)  | 3165 (g) |                                                                         |
| Certification        |                             | CE, UL*                                                                                                                                       |          |         |                                                                       |          |          |                                                                         |


\* Please inform when ordering

Dimensions


P5043 A/B

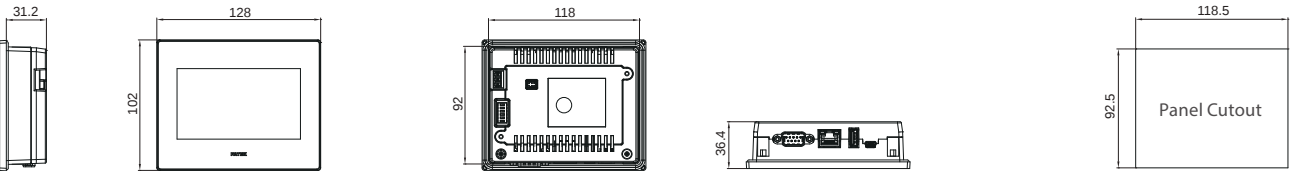


P5070 A

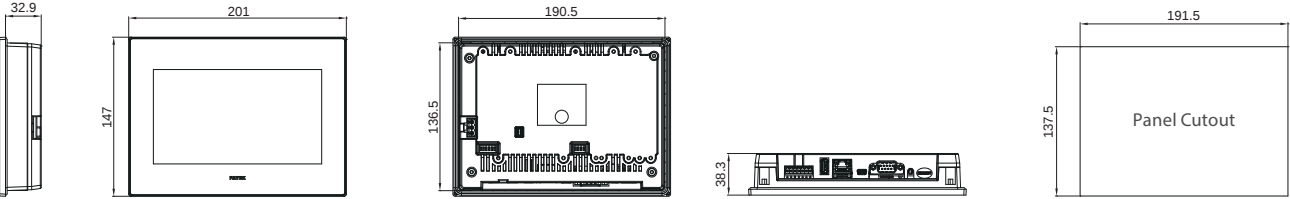


P5070 B

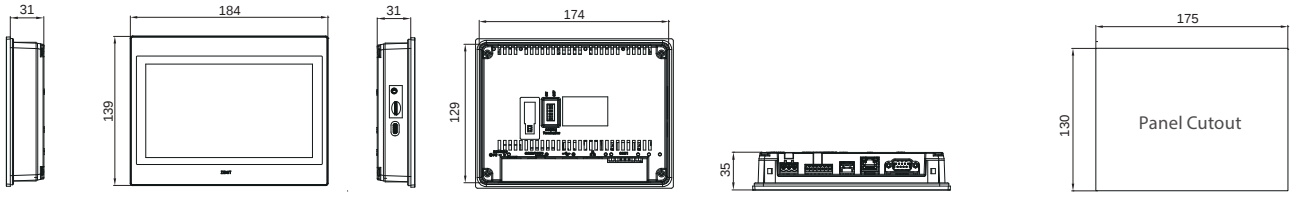

P5101 A

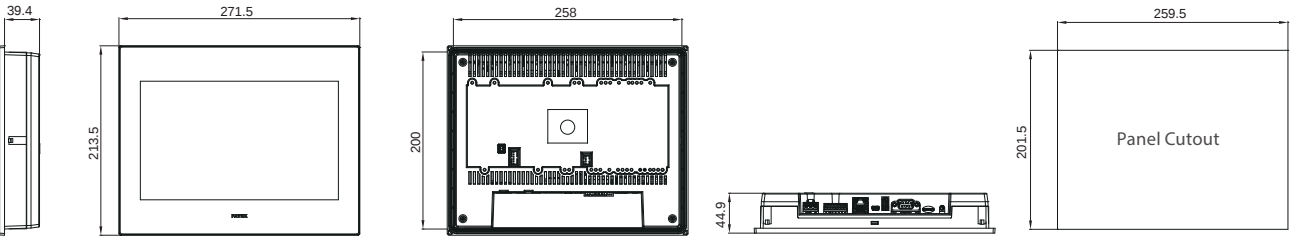

P5150 B

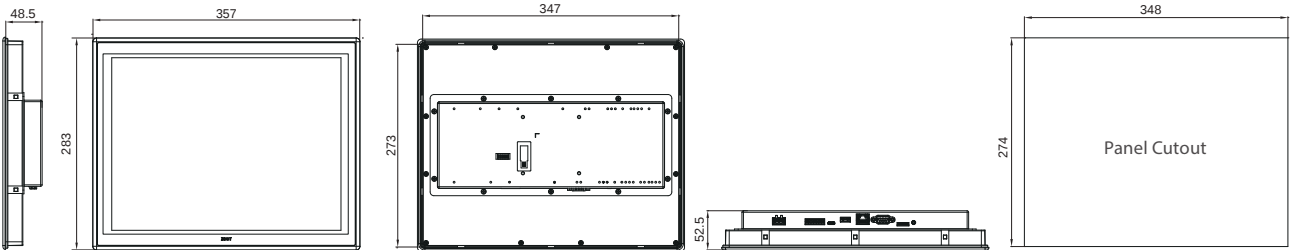

P5 Accessories

| Item Name               | Model             | Description                                                                                              |
|-------------------------|-------------------|----------------------------------------------------------------------------------------------------------|
| Nameplate               | P5NP043A/B        | Nameplate for P5043SA/B,NA/B                                                                             |
|                         | P5NP070A/B        | Nameplate for P5070SA/B,NA/B,ZA/B                                                                        |
|                         | P5NP101A          | Nameplate for P5101SA/NA/ZA                                                                              |
|                         | P5NP150B          | Nameplate for P5150ZB                                                                                    |
| USB 1.8m download cable | USBA-MINIB-180    | 1.8m USB mini B type to USB A type download cable                                                        |
| Communication Cable     | FBs-232P0-9FR-200 | Mini-DIN 4M to DB9F 90 ° communication cable, (FBs main unit Port 0 RS232 connect to DB9M), Length 200cm |
| Connector               | P5CC070           | 7-pin screw terminal block                                                                               |
|                         | P5PC070           | 7-pin spring terminal block                                                                              |
|                         | HMPC043           | Power Connector for P5043SA/NA                                                                           |
|                         | HMPC070           | Power Connector for P5070SA/B,NA/B,ZA/B, P5101SA/NA/ZA and P5150ZB                                       |
| Optional                | HMPC043H          | Power Connector for P5043SA/B,NA/B (horizontal wire entry)                                               |
|                         | HMPC070H          | Power Connector for P5070SA/B,NA/B,ZA/B, P5101SA/NA/ZA and P5150ZB (horizontal wire entry)               |

HB1 & B1 Options

| Item Name                    |                                          | Model               | Specifications                                                                                                                                                                                                                                                                                                              |
|------------------------------|------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main Units                   | HB1 main units*                          | HB1-10MB ◇ 25-D24SA | 6 point 24VDC digital input(4 points 50KHz, 2 points total 5KHz), 4 point relay output or transistor output(2 points 50KHz), build-in HMI port(back)+RS232+RS485 communication ports, left side is expandable 1-2 modules, right side is expandable up to 128 I/O points, built-in RTC and with detachable terminal block   |
|                              |                                          | HB1-14MB ◇ 25-D24SA | 8 point 24VDC digital input(4 points 50KHz, 4 points total 5KHz), 6 point relay output or transistor output(2 points 50KHz), build-in HMI port(back)+RS232+RS485 communication ports, left side is expandable 1-2 modules, right side is expandable up to 128 I/O points, built-in RTC and with detachable terminal block   |
|                              |                                          | HB1-20MB ◇ 25-D24SA | 12 point 24VDC digital input(6 points 50KHz, 6 points total 5KHz), 8 point relay output or transistor output(4points 50KHZ), build-in HMI port(back)+RS232+RS485 communication ports, left side is expandable 1-2 modules, right side is expandable up to 128 I/O points, built-in RTC and with detachable terminal block   |
|                              |                                          | HB1-24MB ◇ 25-D24SA | 14 point 24VDC digital input(8 points 50KHz, 6 points total 5KHz), 10 point relay output or transistor output(4points 50KHZ), build-in HMI port(back)+RS232+RS485 communication ports, left side is expandable 1-2 modules, right side is expandable up to 128 I/O points, built-in RTC and with detachable terminal block  |
|                              |                                          | HB1-32MB ◇ 25-D24SA | 20 point 24VDC digital input(8 points 50KHz, 8 points total 5KHz), 12 point relay output or transistor output(6 points 50KHZ), build-in HMI port(back)+RS232+RS485 communication ports, left side is expandable 1-2 modules, right side is expandable up to 128 I/O points, built-in RTC and with detachable terminal block |
|                              |                                          | HB1-40MB ◇ 25-D24SA | 24 point 24VDC digital input(8 points 50KHz, 8 points total 5KHz), 16 point relay output or transistor output(6 points 50KHZ), build-in HMI port(back)+RS232+RS485 communication ports, left side is expandable 1-2 modules, right side is expandable up to 128 I/O points, built-in RTC and with detachable terminal block |
|                              |                                          | HB1-60MB ◇ 25-D24SA | 36 point 24VDC digital input(8 points 50KHz, 8 points total 5KHz), 24 point relay output or transistor output(8 points 50KHZ), build-in HMI port(back)+RS232+RS485 communication ports, left side is expandable 1-2 modules, right side is expandable up to 128 I/O points, built-in RTC and with detachable terminal block |
| Right Side Expansion Modules | DIO Expansion Modules                    | B1-4Y ◇ S           | 4 points relay or transistor output                                                                                                                                                                                                                                                                                         |
|                              |                                          | B1-8XS              | 8 points 24VDC digital input                                                                                                                                                                                                                                                                                                |
|                              |                                          | B1-8Y ◇ S           | 8 points relay or transistor output                                                                                                                                                                                                                                                                                         |
|                              |                                          | B1-8XY ◇ S          | 4 points 24VDC digital input, 4 points relay or transistor output                                                                                                                                                                                                                                                           |
|                              |                                          | B1-16XS             | 16 points 24VDC digital input                                                                                                                                                                                                                                                                                               |
|                              |                                          | B1-16Y ◇ S          | 16 points relay or transistor output                                                                                                                                                                                                                                                                                        |
|                              |                                          | B1-16XY ◇ S         | 8 points 24VDC digital input, 8 points relay or transistor output                                                                                                                                                                                                                                                           |
|                              |                                          | B1-24XY ◇ S         | 14 points 24VDC digital input, 10 points relay or transistor output                                                                                                                                                                                                                                                         |
|                              |                                          | B1-40XY ◇ S         | 24 points 24VDC digital input, 16 points relay or transistor output                                                                                                                                                                                                                                                         |
|                              |                                          | B1-60XY ◇ S         | 36 points 24VDC digital input, 24 points relay or transistor output                                                                                                                                                                                                                                                         |
|                              | AIO Modules                              | B1-2DAS             | Non-Isolated 2 channels, 12-bit analog output module(-10~10V, 0~10V or -20~20mA, 0~20mA)                                                                                                                                                                                                                                    |
|                              |                                          | B1-6ADS             | Non-Isolated 6 channels, 12-bit analog input module (-10~10V, 0~10V or -20~20mA, 0~20mA)                                                                                                                                                                                                                                    |
| Left Side Expansion Modules  | AIO Modules                              | B1-L2DAS            | 2 channels, 12-bit analog output module (0~10V or 0~20mA)                                                                                                                                                                                                                                                                   |
|                              |                                          | B1-L4ADS            | 4 channels, 12-bit analog input module (0~10V or 0~20mA)                                                                                                                                                                                                                                                                    |
|                              |                                          | B1-L2A2DS           | 2 channels, 12-bit analog input + 1 channel, 12-bit analog output combo analog module (0~10V or 0~20mA)                                                                                                                                                                                                                     |
|                              |                                          | B1-L4NTCS           | 4 channels, NTC temperature input module, 12-bit resolution , measuring range 100Ω~100KΩ                                                                                                                                                                                                                                    |
|                              | Communication Modules                    | B1-CM2S             | 1 port RS232(Port4) communication module                                                                                                                                                                                                                                                                                    |
|                              |                                          | B1-CM5S             | 1 port RS485(Port4) communication module                                                                                                                                                                                                                                                                                    |
|                              |                                          | B1-CM22S            | 2 ports RS232 communication module                                                                                                                                                                                                                                                                                          |
|                              |                                          | B1-CM55S            | 2 ports RS485 communication module                                                                                                                                                                                                                                                                                          |
| HB1 & B1 Peripherals         | General Purpose Communication Converters | FBs-CM25C           | General purpose RS232 to RS485/RS422 communication interface converter with photocouple isolation                                                                                                                                                                                                                           |
|                              |                                          | FBs-CM5R            | General purpose RS485 repeater with photocouple isolation                                                                                                                                                                                                                                                                   |
|                              |                                          | FBs-CM5H            | General purpose 4 ports RS485 HUB with photocouple isolation, RS485 can be connected as star connection                                                                                                                                                                                                                     |
|                              | Bluetooth Communication Module           | FBs-B2C             | Bluetooth Module for PLC Main Unit Port 0                                                                                                                                                                                                                                                                                   |
|                              | USB Communication Converter              | FBs-U2C-MD-180      | Communication converter cable with standard USB AM connector to RS232 Mini-DIN 4M connector (used in standard PC USB to FBs main unit Port0 RS232), length 180cm                                                                                                                                                            |
|                              | Communication Cable                      | FBs-232P0-9F-150    | Mini-DIN 4M to DB9F communication cable (FBs main unit Port 0 RS232 connect to standard DB9M), length 150cm                                                                                                                                                                                                                 |
|                              |                                          | FBs-232P0-9M-400    | Mini-DIN 4M to DB9M communication cable (FBs main unit Port 0 RS232 connect to standard DB9F), length 400cm                                                                                                                                                                                                                 |
|                              |                                          | FBs-232P0-MD-200    | Mini-DIN 4M to Mini-DIN 4M communication cable (FBs main unit Port 0 RS232 connect to FBs-PEP/PEPR), length 200cm                                                                                                                                                                                                           |
|                              |                                          | FBs-232P0-MDR-200   | Mini-DIN 4M to 90° Mini-DIN 4MM communication cable(FBs main unit Port0 RS232 connect to FBs-PEP/PEPR), length 200cm                                                                                                                                                                                                        |

◇ : R - Relay output, T - Transistor Sink(NPN) output, J - Source (PNP) output

\*HB1 must back mount on FATEK HMI for use